



Current transformers are used to measure the current in electrical switchboards & control Panels.


Available in different types, sizes & current ratings.

MIKRA - Taiwan **MIKRA**

Ordering Information

Order No	Model No	Product	Range	Burden	Class	OD (mm)	ID (mm)
225 700	MR-28-30	Current Transformer-Round	30/5A	1.0	1	70	28
225 701	MR-28-50	Current Transformer-Round	50/5A	2.5	1	70	28
225 702	MR-28-60	Current Transformer-Round	60/5A	2.5	1	70	28
225 703	MR-28-100	Current Transformer-Round	100/5A	2.5	1	70	28
225 704	MR-42-150	Current Transformer-Round	150/5A	5	1	80	42
225 705	MR-42-200	Current Transformer-Round	200/5A	5	1	80	42
225 706	MR-42-250	Current Transformer-Round	250/5A	5	1	80	42
225 708	MR-60-400	Current Transformer-Round	400/5A	5	1	80	42
225 749	MFO-30-30	Current Transformer-Square	30/5A	2VA	1		
225 750	MFO-30-50	Current Transformer-Square	50/5A	2VA	1		
225 751	MFO-30-60	Current Transformer-Square	60/5A	2VA	1		
225 753	MFO-30-100	Current Transformer-Square	100/5A	2.5A	1		
225 755	MFO-30-150	Current Transformer-Square	150/5A	3VA	1		
225 756	MFO-30-200	Current Transformer-Square	200/5A	5	1		
225 757	MFO-40-250	Current Transformer-Square	250/5A	3	1		
225 759	MFO-40-400	Current Transformer-Square	400/5A	5	1		
225 761	MFO-40-600	Current Transformer-Square	600/5A	5	1		
225 762	MFO-40-800	Current Transformer-Square	800/5A	5	1		

Technical Details

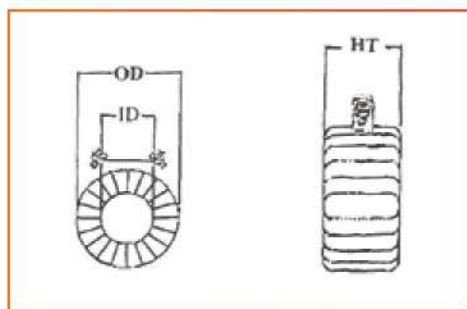

MR-28-100




MR-42-150



MR-60-400



MFO-30-100

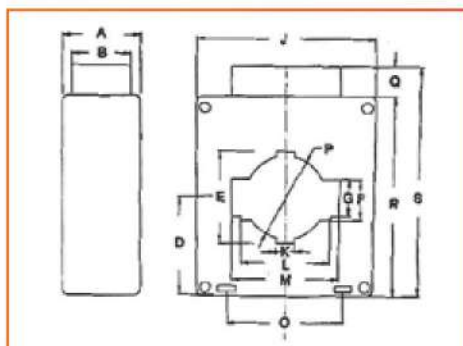

MFO-40-400



MOTD	MFO-30		MFO-40	
Ratio	Power Class		Power Class	
50/5A	2VA*	1A		
60/5A	2VA*	1A		
75/5A	2.5VA*	1A		
100/5A	2.5VA*	1A		
125/5A	2.5VA*	1A		
150/5A	3VA*	1A		
200/5A	5VA*	1A	3VA*	1A
250/5A	5VA*	1A	3VA*	1A
300/5A	5VA*	1A	5VA*	1A
400/5A	5VA*	1A	5VA*	1A
500/5A	5VA*	1A	5VA*	1A

	MFO-30	MFO-40
Primary / Secondary (A)	30/5A-500/5A	30/5A-500/5A
Window dimension	30×10mm	40×10mm
PCOAD (VA)	2.5	5
Accuracy Class	1.0	1.0
Rated Voltage	600V	600V

Ordering Information

Order No	Model No	Product	Range	Burden	Class
228 160	MR-60 400/5A	Current Transformer-Round	400/5A	5	1
228 164	MR-60 500/5A	Current Transformer-Round	500/5A	5	1
228 180	MR-125 1200/5A	Current Transformer-Round	1200/5A	15	1
228 199	MR-125 2500/5A	Current Transformer-Round	2500/5A	20	1
230 802	CTB - 60/5A	Current Transformer-Sqaure	60/5A		
230 803	CTB - 100/5A	Current Transformer-Sqaure	100/5A		
230 806	CTB - 250/5A	Current Transformer-Sqaure	250/5A		
230 811	CTB - 800/5A	Current Transformer-Sqaure	800/5A		
230 814	CTB - 1600/5A	Current Transformer-Sqaure	1600/5A		

Technical Details

MR-60 400/5A



CTB - 1600/5A



	MR-28	MR-42	MR-60	MR-85	MR-125
Specification	30/5A-60/5A	100/5A-2500/5A	400/5A-600/5A	800/5A-1600/5A	2000/5A-5000/5A
ID (mm)	28	42	60	85	125
OD (mm)	70	80	100	120	165
HT (mm)	40	30	30	20	20